




Higher Precision



Higher Protection Level(IP67)

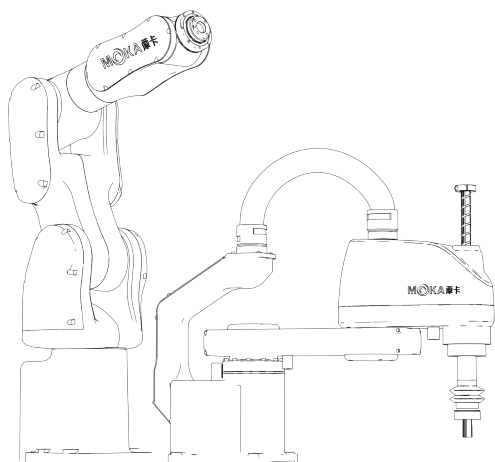

Higher Speed




Better Price Performance



Moka Robot is a high-tech robot manufacturer providing high quality industrial robots and solutions to our customers. As one of the earliest companies who manufactures industrial robots, we offer professional, timely service and complete robot application solutions. Our robot system is highly stable and mature. After years of development, our products are widely used in industrial automation applications such as welding, painting, handling, palletizing and polishing, both in China and the global market. Our industrial robots are developed by our company with independent intellectual property rights. The motion of each joint of the robot is realized by high performance servo motors and a high precision reducers. The core advantages of our industrial robots include: cost-effective, compact structure, highly reliable, high speed, high precision, easy to operate and easy to maintain. For details, please visit www.mokarobot.com.

Honorary qualifications

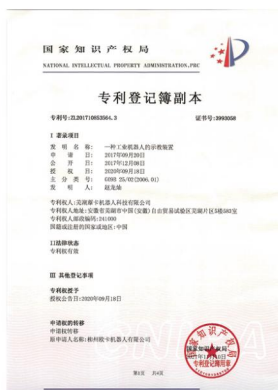



MB SERIES

SCARA ROBOTS



MB04SC-300



MB04SC-400



MB10SC-500



MB10SC-600



MB10SC-700



MB10SC-800



MB25SC-800



MB25SC-900



MB25SC-1000

MB SERIES

SMALL 6-AXIS ROBOTS



MB04S-580



MB10S-740



MB10S-920

MB SERIES

GENERAL 6-AXIS ROBOTS



MB20-2100



MB35-1870



MB45-1870



MB SERIES

HEAVY DUTY 6-AXIS ROBOTS



MB180-3200



MB210-2650



MB280-2650

MB SERIES

MR SERIES ROBOTS



MR10C-1488



MR30C-1750



MR10W-1440-D



MR12-2010



MR12Z-1550



MR80E-2250




MR60E-2680

MR60E-2680

PAYLOAD : 60KG


REPEATABILITY : $\pm 0.08\text{mm}$

MOKA

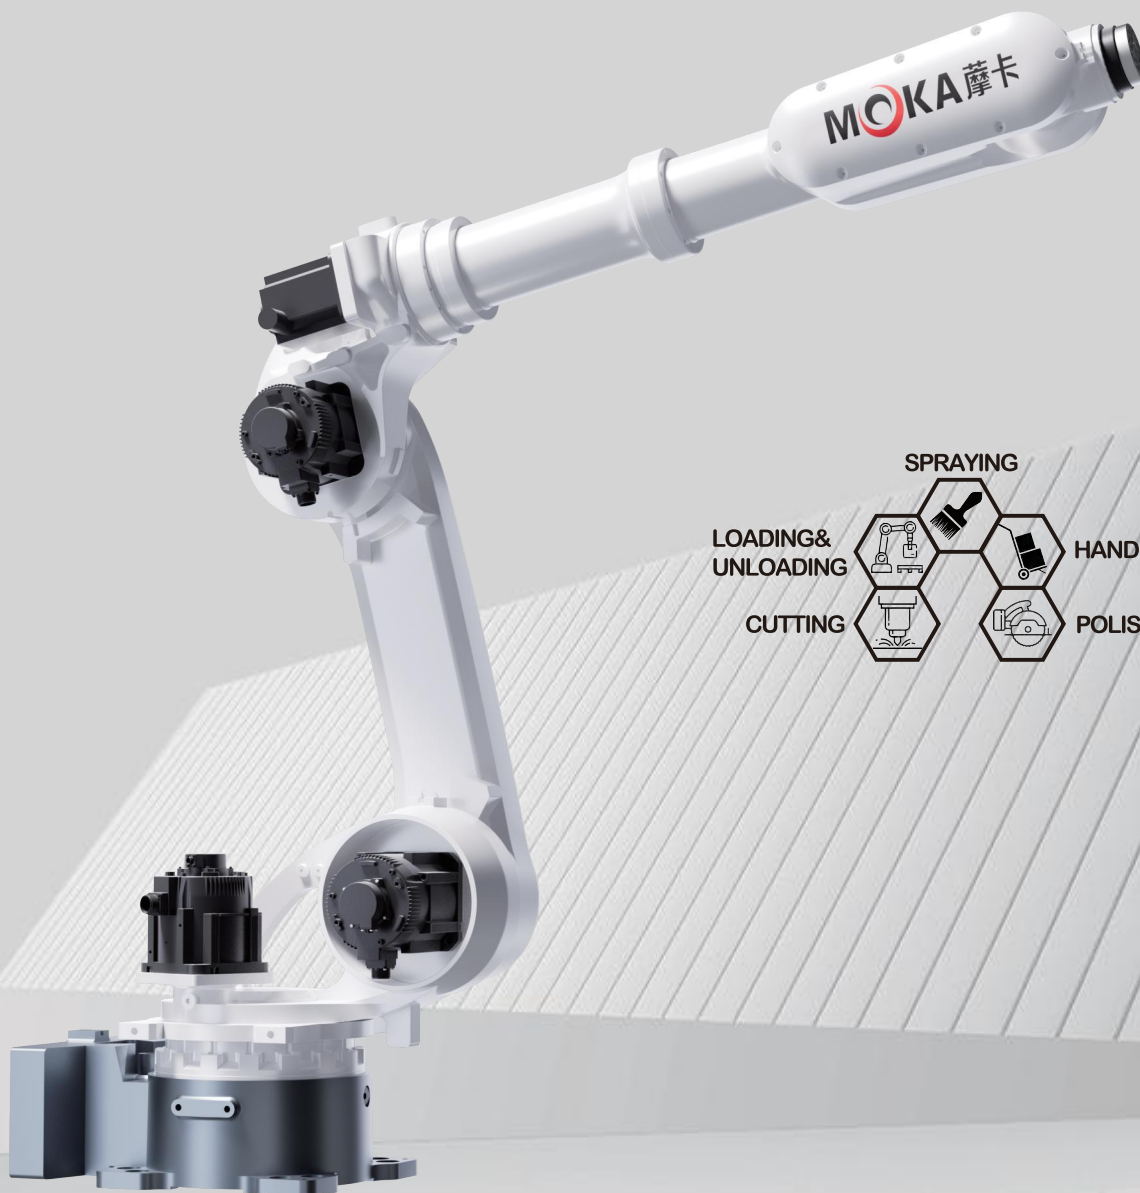

Number of axis	6-axis		Maximum speed	Moving range
Motion radius	2680mm	J1 axis S	214°/s	$\pm 160^\circ$
Power capacity	19.0KVA	J2 axis L	149°/s	+90°~-120°
Max Payload	60KG	J3 axis U	175°/s	+140°~-70°
Protection class	IP56/IP67	J4 axis R	378°/s	$\pm 190^\circ$
Repeatability	$\pm 0.08\text{mm}$	J5 axis B	285°/s	+30°~-210°
Robot mass	655KG	J6 axis T	370/s	$\pm 360^\circ$
Built-in air tube	$\Phi 8/\Phi 10$	J4 axis R(N.m)		210
Input/Output signals	Standard 16 in/16 out 24 VDC	J5 axis B(N.m)		210
Mounting position	Floor/frame/ceiling	J6 axis T(N.m)		130

MADE BY MOKAROBOT



Installation Environment

Temperature	0-45°C	Humidity	20~80%RH(no condensing)	No corrosive or combustible gas, no water, no splashing	No excessive oil or dust
Vibrations	Below 4.9M/S2 (0.5G)	Altitude	Below 1000M	Away from electromagnetic source	Away from magnetic field

Control cabinet specifications

Overall dimension	850(width)*550(depth)*920(height)mm (with protrusions)
Approximate mass	170KG
Cooling method	Natural cooling
Power specifications	3PH AC380V 50/60HZ (with built-in 380V~220V isolated transformer)
Grounding	Industrial grounding (dedicated grounding, resistance below 100Ω)
Input/Output signal	General signal: 16 input, 16 output
Position control method	Serial communication EtherCAT.TCP/IP
Memory capacity	JOB: 200000 steps, 10000 robot commands (total 200M)
LAN(Host link)	Ethercat(1pc) TCP/IP(1pc)
Control mode	Servo position control
Ambient temperature	In use: 0~ + 45°C, In storage: - 20~ + 60°C
Driver unit	AC servo system (6-axis)
Relative humidity	10%~90%(no condensing)
Vibrate	Below 0.5G

Serial port I/F

RS485(1pc) RS422(1pc) RS232(1pc) CAN(1pc) USB(1pc)

Altitude

Below 1000m. Derate 1% for every additional 100m if over 1000m. Maximum 2000m.

Others

No dust, cutting fluid (including coolant), organic solvent, oil smoke, water, salt, medicine, anti-rust oil, strong microwave, ultraviolet light, X-ray, radiation exposure

Teach pendant specifications

External dimensions	280(width)*220(depth)*120(height)mm (with protrusions)
Gross weight	0.6KG
Material	Reinforced plastics
Display	8 inch color LED, 640*480 pixels
Protection class	IP54
Cable Length	Standard: 5m Optional: 15m

Manipulator

Selector, axis operation, value, mode selection with key (teach mode/auto mode/remote mode), emergency stop, enable, USB port etc



ATTENTION

Please read the user manual and relevant documentations before use.




Contact official staff or distributor of MOKA if there are any errors, faults or if the robot is a harm to human safety.

All data, drawings and specifications provided in this catalog are purely for information purposes and do not constitute a guarantee of these characteristics. The extent of goods delivered and services performed is determined by the subject matter of the specific contract. No liability accepted for errors or omissions.

TECHNICAL SPECIFICATION

External dimensions and moving range

P moving range

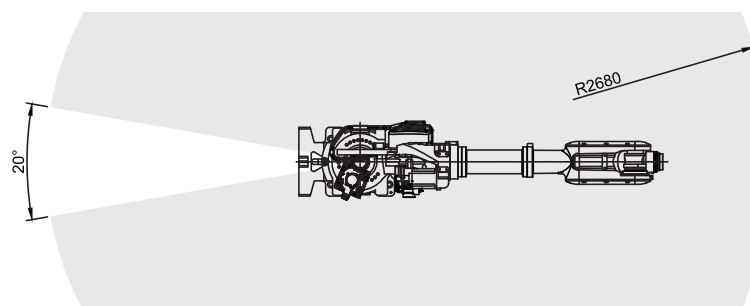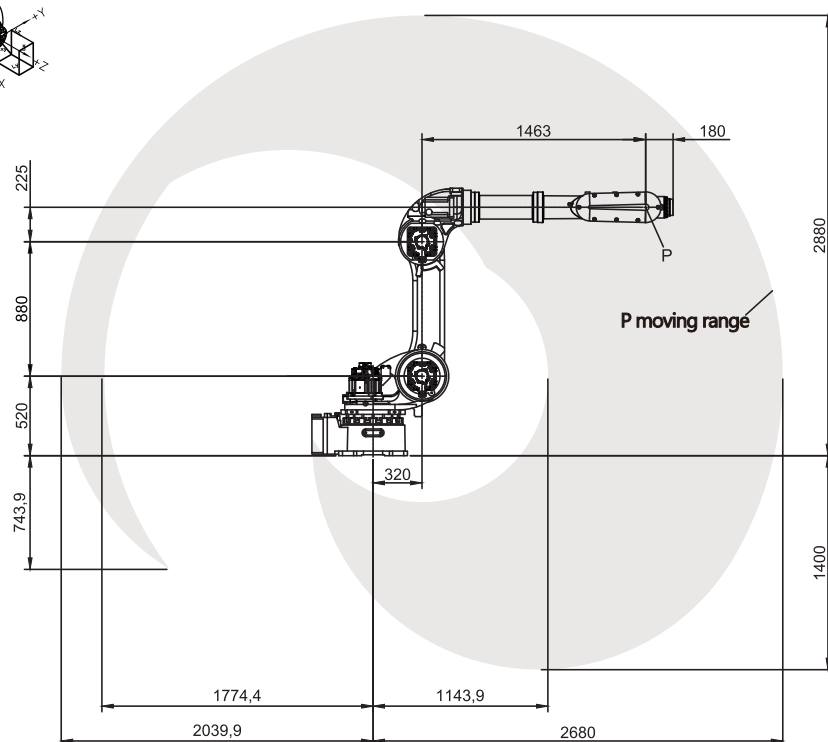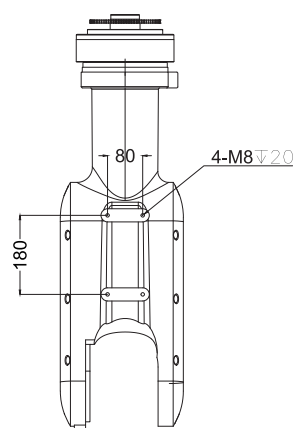


Technical drawing of a circular plate with 24 holes. The top view shows a circular plate with a central hole of diameter $\varnothing 11 \pm 0.05$ (12X) PCD $\varnothing 75$. There are 24 holes arranged in a circular pattern with a pitch circle diameter (PCD) of $\varnothing 105.00$. The holes have a diameter of $\varnothing 7$ (12X) PCD $\varnothing 54$. The plate has a thickness of 2.60. The side view shows the plate with a thickness of 2.60 and a central hole of diameter $\varnothing 11 \pm 0.05$ (12X) PCD $\varnothing 75$. The plate is made of material B and has a surface finish of 0.02. The drawing includes dimensions for the holes, the central hole, and the plate thickness, along with tolerances and surface finish requirements.

Technical drawing of a circular mechanical part, likely a flange or end plate, showing dimensions and features:

- 2- $\phi 12$ (Pin hole) $_{-0}^{+0.02}$** : Two pin holes with a diameter of 12 mm and a tolerance of $_{-0}^{+0.02}$ mm.
- $\phi 48.4$** : Dimension for the outer diameter of the main body.
- 14°**: Angle of the chamfer on the outer edge.
- 38°**: Angle of the chamfer on the side flange.
- 2015**: Dimension for the radius of the main body.
- 2**: Dimension for the thickness of the main body.
- 2015**: Dimension for the radius of the side flange.
- $\phi 45$ 榫**: Dimension for the diameter of the central shaft (keyway).
- 8- $\phi 25$ (Through hole)**: Eight through holes with a diameter of 25 mm.

MADE BY MOKAROBOT

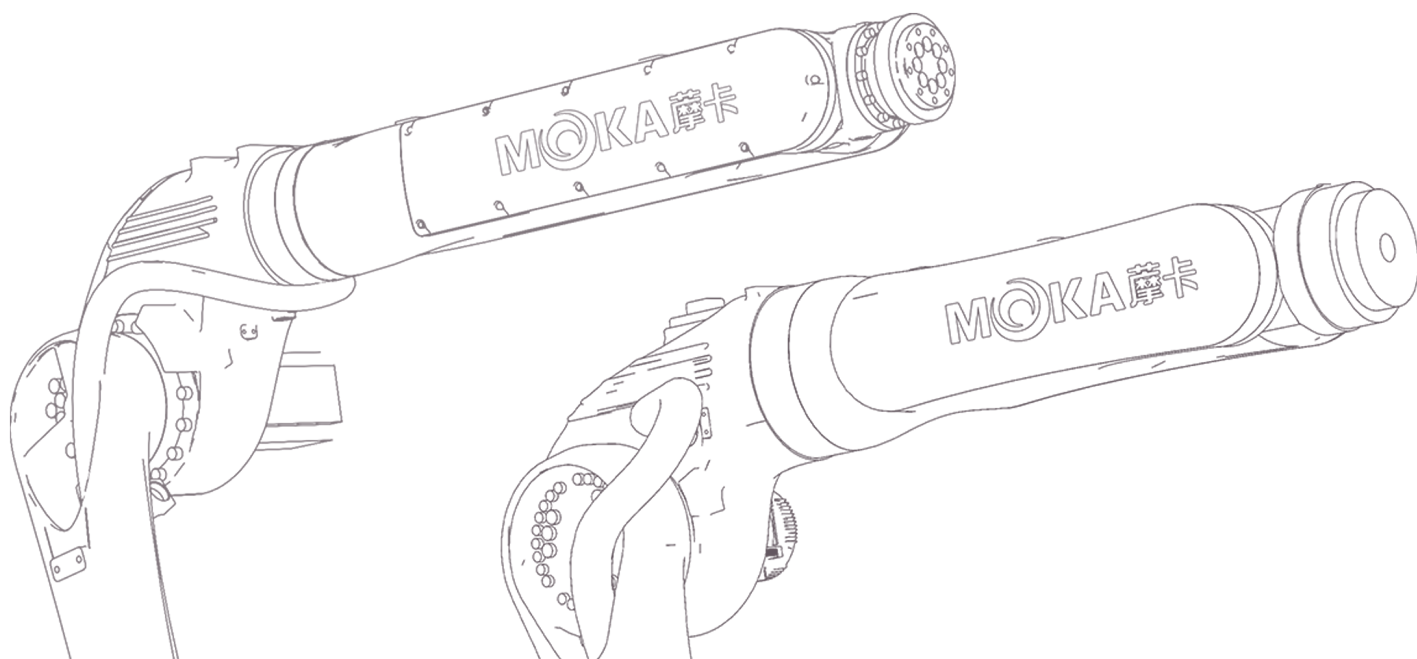

MOKA 摩卡

Committed to providing customers with
the most valuable products

WUHU MOKA ROBOT TECHNOLOGY CO., LTD

ADD: NO.19 WEISI ROAD, JIUJIANG DISTRICT, WUHU, ANHUI, CHINA

PHONE: +86-18262626857

WHATSAPP: +86-18262626857

EMAIL: thomas@mokarobot.com

WEBSITE: www.mokarobot.com